




Cap

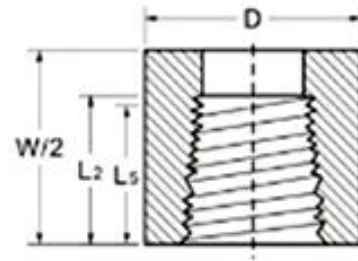

Half Coupling

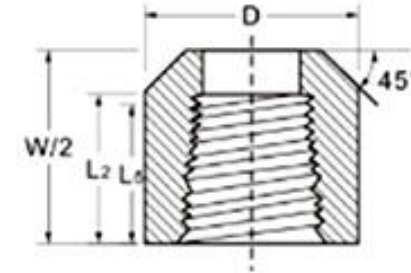

Thredolet

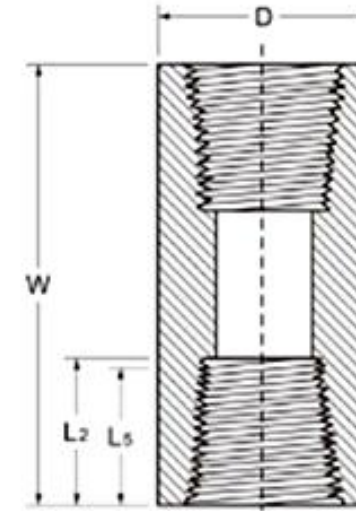

Coupling

JINIE TECHNOLOGY (JIANGSU) CO., LTD.

ASME B16.11 Cap, Half-Coupling. Threadolet, Coupling

Nominal size		End-to-end	End-to-end		Outside diameter		End wall		Length of thread	
DN	NPS	W	P		D		G		L _{5min}	L _{2min}
		3000 & 6000	3000	6000	3000	3000	3000	3000		
6	1/8	32	19	—	16	22	4.8	—	6.4	6.7
8	1/4	35	25	27	19	25	4.8	6.4	8.1	10.2
10	3/8	38	25	27	22	32	4.8	6.4	9.1	10.4
15	1/2	48	32	33	28	38	6.4	7.9	10.9	13.6
20	3/4	51	37	38	35	44	6.4	7.9	12.7	13.9
25	1	60	41	43	44	57	9.7	11.2	14.7	17.3
32	1 ¹ / ₄	67	44	46	57	64	9.7	11.2	17.0	18.0
40	1 ¹ / ₂	79	44	48	64	76	11.2	12.7	17.8	18.4
50	2	86	48	51	76	92	12.7	15.7	19.0	19.2
65	2 ¹ / ₂	92	60	64	92	108	15.7	19.0	23.6	28.9
80	3	108	65	68	108	127	19.0	22.4	25.9	30.5
100	4	121	68	75	140	159	22.4	28.4	27.7	33.0

Note:

1) NPT thread shall be machined as per GB/T 12716 (equivalent to ASME B1.20.1).